



GLOBAL
SPECIAL EFFECTS

F-3000 FOG MACHINE

USER MANUAL



TECHNICAL SPECIFICATIONS

Size	29"L x 13"W x 8"H
Weight	Approx. 30 lbs
Wattage	3000W
Voltage	110V
Projection	Up to 65+ ft.
Output	40,000 cu.ft/min
Heat Up Time	Approx. 10 Mins
Tank Capacity	2.5 Gallons

CUSTOMER SERVICE

Thank you for purchasing the F-3000 Fog Machine! Please contact us with any questions or comments you may have.


Phone Support: (256) 229-5551

Email Support: info@globalspecialeffects.com

NOTE:

Please read this instruction manual thoroughly prior to use. Failure to comply with instructions could result in personal injury or property damage. Retain this instruction manual for future reference.



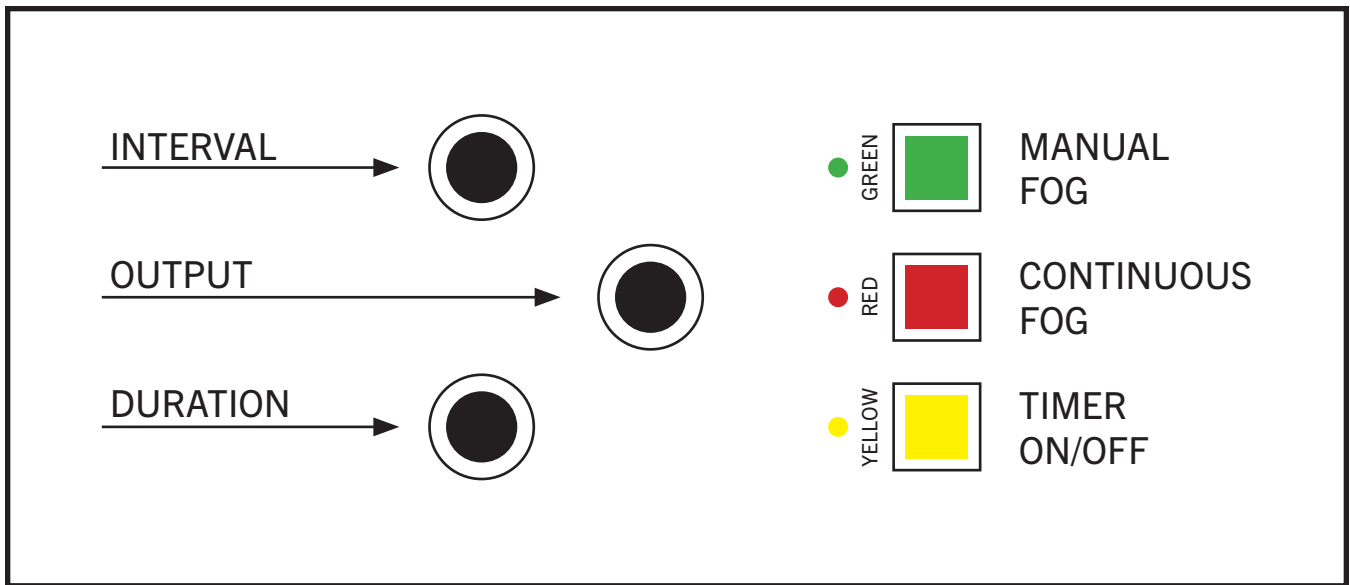

WIRE CONTROLLER OPERATION

1. For manual fog settings, press the green Manual Fog button.
2. For continuous fog settings, press the red Continuous Fog button.
3. For timed fog settings, press the yellow Timer button.

DMX CONTROL OPERATION

SW	1	2	3	4	5	6	7	8	9	10
CH	1	2	4	8	16	32	64	128	256	512

SW = The DMX address which you can choose on the back of the machine.

CH = The DMX channel

DMX EXAMPLES

1. If you would like to control the machine by channel 4 on the DMX 512 controller, turn on the switch address No. 3.
2. If you would like to control the machine by channel 16 on the DMX 512 controller, turn on the switch address No. 5.
3. If you would like to control the machine by channel 127 on the DMX 512 controller, turn on the switch address No. 1 + No. 2 + No. 3 + No. 4 + No. 5 + No. 6 + No. 7 together.
4. If you would like to control the machine by channel 120 on the DMX 512 controller, turn on the switch address No. 4 + No. 5 + No. 6 + No. 7 together.

NOTE:

The sum of CH Numbers is the Channel Number of the DMX Controller.

NOTES:

1. Please read entire manual thoroughly prior to use.
2. Always keep fog machine clean and free of debris.
3. Keep the fog machine in its horizontal position. Do not place at an incline or upside down.
4. Always power off and unplug the unit when not in use.
5. This unit is not waterproof. Do not expose to water/excessive dampness.
6. Do not attempt to perform service on this machine. If in need of repair, please contact Global Special Effects at (256) 229-5551.

USAGE INFORMATION

1. Fog machines heat up naturally. Always ensure a 36” distance is kept between the machine and any flammable materials.
2. Run fog machine in an open area and ensure cooling holes aren't blocked.
3. Keep at least 8” of space between the fog machine and walls or barriers.
4. Never put any flammable liquid in or near the fog machine.
5. Abide by all operating instructions provided in this manual.
6. Use Global Special Effects fog fluid only. Using other fog fluid may damage the machine and will void the warranty.
7. Always remove fog fluid before transporting machine.

SET UP

1. Ensure all packaging material is removed.
2. Place the machine horizontally on a flat, level surface.
3. Open the fluid reservoir, fill with desired fog fluid, and reattach cap. Ensure Global Special Effects fluids are being used, as low quality fluid can cause clogs and internal damage to the machine therefore voiding the warranty.
4. Plug the remote console in the socket of the back of the machine.

OPERATING

1. Connect the power line to a grounded power socket. Turn the switch to the “ON” position and allow the machine up to (12) minutes to warm up. A red LED light will appear once the machine has finished warming up.
2. Press the red key and the machine will spray fog.
3. If the red LED on the remote console does not light, machine is reheating.
4. The machine can be placed at ground level or hung with the included hanging bracket.
5. Throughout use, ensure the fluid reservoir does not run empty. Running the machine without fluid may cause internal damage and void the warranty.

MAINTENANCE

- Keep the machine clean by wiping down with dry cloths.
- Ensure the fluid reservoir cap is properly tightened to avoid spills.
- After approximately 40 hours of use, we recommend cleaning the machine by running 80% distilled water and 20% vinegar through the machine.
- If the spray nozzle requires cleaning, remove nozzle head and clean with vinegar.
- Ensure the machine is off and unplugged before cleaning or performing any maintenance. Do not clean immediately after using machine. Before any cleaning or maintenance, allow machine to cool down.

WARRANTY

1-YEAR LIMITED WARRANTY

Global Special Effects provides a 1-Year Limited Warranty for the F-3000 from any manufacturing defects. Any misuse, abuse, or negligence automatically voids this warranty. Running any other fluids or solutions other than Global Special Effects solutions through the pump automatically voids this warranty. Global Special Effects is not responsible for loss of income, labor, or business as a result of a F-3000 Fog Machine malfunction. Global Special Effects is not responsible for physical damage, scratching, or tube damage after shipping from the Global Special Effects manufacturing facility. For safety reasons, Global Special Effects will repair damaged electrical wires per the warranty. The 1-Year Limited Warranty applies to the circuit board and other electronics to the blower or pump.

Direct all questions and claims to the Global Special Effects customer service line at (256) 229-5551.



Tech Support:
(256) 229-5551

Email:
info@globalspecialeffects.com